


Commercial "DX" Horizontal Slab Coils

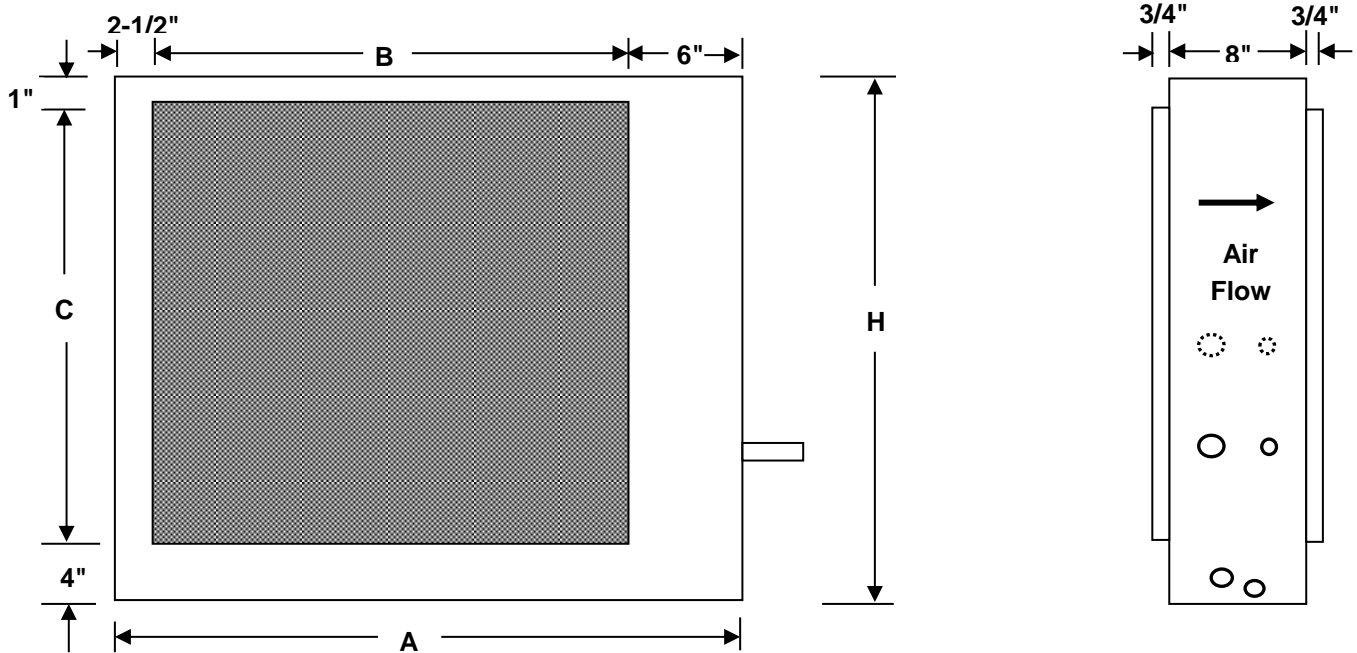

Model Size	Casing Depth A	Duct Opening		Casing Height H	Suction Line O.D.	Liquid Line O.D.	Refrigerant Circuits
		Depth B	Height C				
072	44-5/8"	36"	21"	26"	7/8"	1/2"	Single
072 Dual	44-5/8"	36"	21"	26"	(2) 7/8"	(2) 1/2"	Dual
090	44-5/8"	36"	26"	31"	1-3/8"	5/8"	Single
090 Dual	44-5/8"	36"	26"	31"	(2) 1-3/8"	(2) 5/8"	Dual
120	53-1/2"	45"	28-1/2"	33-1/2"	1-3/8"	5/8"	Single
120 Dual	53-1/2"	45"	28-1/2"	33-1/2"	(2) 1-3/8"	(2) 5/8"	Dual
150	53-1/2"	45"	28-1/2"	33-1/2"	1-3/8"	5/8"	Single
150 Dual	53-1/2"	45"	28-1/2"	33-1/2"	(2) 1-3/8"	(2) 5/8"	Dual
180	53-1/2"	45"	41"	46"	1-5/8"	5/8"	Single
180 Dual	53-1/2"	45"	41"	46"	(2) 1-5/8"	(2) 5/8"	Dual
240	68-1/2"	60"	46"	51"	1-5/8"	5/8"	Single
240 Dual	68-1/2"	60"	46"	51"	(2) 1-5/8"	(2) 5/8"	Dual

Standard Features:

- U.L. Listed
- Fully Insulated Cabinet
- 20 Gauge Embossed Galvanized Cabinets
- Factory Installed TVX
- Coils tested at 500 PSI, Sealed and Pressurized with Nitrogen
- Stainless Steel Drain Pan

Optional Features:

- Dual Circuiting
- Check Valve Kit (Heat Pump Operation)