

CD Series™


Dedicated Horizontal Cased Coil shown with Quick Plenum™ (QP Series)™

Features of CD Series™ Coil:

- Bi-Directional Air Flow Not Required Due to Dual Drain Connections on Each Side and External Top Mounted Piston/ Orifice Connection.
- Vacuum Formed High Impact UL Approved PVC Pan
- R-32 and R-454B Models Equipped With Refrigerant Leak Detection System
- Compatible With Cooling Only and Heat Pump Systems

Features of QP Series™ Plenum:

- Quick Installation - Pop-up Hinged Design
- Quickly Attaches to Coil Cabinet
- Cut Holes and Attach Starting Collars
- Shipped 6 Per Carton

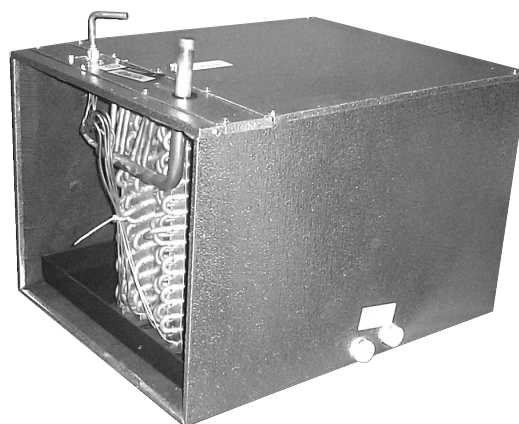

Evaporator Coil Model	Evap. Coil Cabinet Model	Quick Plenum Model	QP Series Quick Plenum Outside Dim. (IN)			CD Series Coil Cabinet Outside Dim. (IN)			CD Series Coil Supply Openings (IN)	
			A	B	C	D	E	F	G	H
CD0XXA82G	DA1-22.5	QPA1-24	14.000	24.0	21.0	14.000	22.5	21.0	20.5	12.5
CD0XXA82G	DA1-22.5	QPA1-30	14.000	30.0	21.0	14.000	22.5	21.0	20.5	12.5
CD0XXA86G	DA1-22.5	QPA1-24	14.000	24.0	21.0	14.000	22.5	21.0	20.5	12.5
CD0XXA86G	DA1-22.5	QPA1-30	14.000	30.0	21.0	14.000	22.5	21.0	20.5	12.5
CD0XXA52G	DA1-26.5	QPA1-24	14.000	24.0	21.0	14.000	26.5	21.0	20.5	12.5
CD0XXA52G	DA1-26.5	QPA1-30	14.000	30.0	21.0	14.000	26.5	21.0	20.5	12.5
CD0XXA56G	DA1-26.5	QPA1-24	14.000	24.0	21.0	14.000	26.5	21.0	20.5	12.5
CD0XXA56G	DA1-26.5	QPA1-30	14.000	30.0	21.0	14.000	26.5	21.0	20.5	12.5
CD0XXA59G	DA1-26.5	QPA1-24	14.000	24.0	21.0	14.000	26.5	21.0	20.5	12.5
CD0XXA59G	DA1-26.5	QPA1-30	14.000	30.0	21.0	14.000	26.5	21.0	20.5	12.5
CD0XXA822	DA-22.5	QPA-24	14.500	24.0	21.0	14.500	22.5	21.0	20.5	13.0
CD0XXA822	DA-22.5	QPA-30	14.500	30.0	21.0	14.500	22.5	21.0	20.5	13.0
CD0XXA862	DA-22.5	QPA-24	14.500	24.0	21.0	14.500	22.5	21.0	20.5	13.0
CD0XXA862	DA-22.5	QPA-30	14.500	30.0	21.0	14.500	22.5	21.0	20.5	13.0
CD0XXA892	DA-22.5	QPA-24	14.500	24.0	21.0	14.500	22.5	21.0	20.5	13.0
CD0XXA892	DA-22.5	QPA-30	14.500	30.0	21.0	14.500	22.5	21.0	20.5	13.0
CD0XXA522	DA-26.5	QPA-24	14.500	24.0	21.0	14.500	26.5	21.0	20.5	13.0
CD0XXA522	DA-26.5	QPA-30	14.500	30.0	21.0	14.500	26.5	21.0	20.5	13.0
CD0XXA562	DA-26.5	QPA-24	14.500	24.0	21.0	14.500	26.5	21.0	20.5	13.0
CD0XXA562	DA-26.5	QPA-30	14.500	30.0	21.0	14.500	26.5	21.0	20.5	13.0
CD0XXA592	DA-26.5	QPA-24	14.500	24.0	21.0	14.500	26.5	21.0	20.5	13.0
CD0XXA592	DA-26.5	QPA-30	14.500	30.0	21.0	14.500	26.5	21.0	20.5	13.0
CD0XXA82E	DB-22.5	QPB-24	15.500	24.0	21.0	15.500	22.5	21.0	20.5	14.0
CD0XXA82E	DB-22.5	QPB-30	15.500	30.0	21.0	15.500	22.5	21.0	20.5	14.0
CD0XXA86E	DB-22.5	QPB-24	15.500	24.0	21.0	15.500	22.5	21.0	20.5	14.0
CD0XXA86E	DB-22.5	QPB-30	15.500	30.0	21.0	15.500	22.5	21.0	20.5	14.0
CD0XXA52E	DB-26.5	QPB-24	15.500	24.0	21.0	15.500	26.5	21.0	20.5	14.0
CD0XXA52E	DB-26.5	QPB-30	15.500	30.0	21.0	15.500	26.5	21.0	20.5	14.0
CD0XXA56E	DB-26.5	QPB-24	15.500	24.0	21.0	15.500	26.5	21.0	20.5	14.0
CD0XXA56E	DB-26.5	QPB-30	15.500	30.0	21.0	15.500	26.5	21.0	20.5	14.0
CD0XXA59E	DB-26.5	QPB-24	15.500	24.0	21.0	15.500	26.5	21.0	20.5	14.0
CD0XXA59E	DB-26.5	QPB-30	15.500	30.0	21.0	15.500	26.5	21.0	20.5	14.0

All Technical Specifications Subject to Change Without Notice.

Cont. on next page




For more information contact
Customer Service at
(817) 624-0820 or your Summit
Representative.

FRONT Spec.CD-010101
4.28.25



CD Series™

**Dedicated
Horizontal
A-Coil Cabinet**

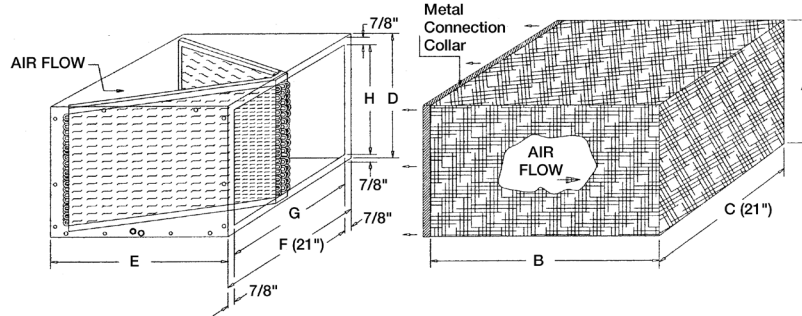

QP Series™

**Duct Board
Plenum Section**
Patent Pending

Features of CD Series™ Coil:

- Bi-Directional Air Flow Not Required Due to Dual Drain Connections on Each Side and External Top Mounted Piston/Orifice Connection.
- Vacuum Formed High Impact UL Approved PVC Pan
- R-32 and R-454B Models Equipped With Refrigerant Leak Detection System
- Compatible With Cooling Only and Heat Pump Systems

Features of QP Series™ Plenum:

- Quick Installation - Pop-up Hinged Design
- Quickly Attaches to Coil Cabinet
- Cut Holes and Attach Starting Collars
- Shipped 6 Per Carton

Evaporator Coil Model	Evap. Coil Cabinet Model	Quick Plenum Model	QP Series Quick Plenum Outside Dim. (IN)			CD Series Coil Cabinet Outside Dim. (IN)			CD Series Coil Supply Openings (IN)	
			A	B	C	D	E	F	G	H
CD0XXA823	DB1-22.5	QPB1-24	16.500	24.0	21.0	16.500	22.5	21.0	20.5	15.000
CD0XXA823	DB1-22.5	QPB1-30	16.500	30.0	21.0	16.500	22.5	21.0	20.5	15.000
CD0XXA863	DB1-22.5	QPB1-24	16.500	24.0	21.0	16.500	22.5	21.0	20.5	15.000
CD0XXA863	DB1-22.5	QPB1-30	16.500	30.0	21.0	16.500	22.5	21.0	20.5	15.000
CD0XXA523	DB1-26.5	QPB1-24	16.500	24.0	21.0	16.500	26.5	21.0	20.5	15.000
CD0XXA523	DB1-26.5	QPB1-30	16.500	30.0	21.0	16.500	26.5	21.0	20.5	15.000
CD0XXA563	DB1-26.5	QPB1-24	16.500	24.0	21.0	16.500	26.5	21.0	20.5	15.000
CD0XXA563	DB1-26.5	QPB1-30	16.500	30.0	21.0	16.500	26.5	21.0	20.5	15.000
CD0XXA593	DB1-26.5	QPB1-24	16.500	24.0	21.0	16.500	26.5	21.0	20.5	15.000
CD0XXA593	DB1-26.5	QPB1-30	16.500	30.0	21.0	16.500	26.5	21.0	20.5	15.000
CD0XXA82C	DC-22.5	QPC-24	17.500	24.0	21.0	17.500	22.5	21.0	20.5	16.000
CD0XXA82C	DC-22.5	QPC-30	17.500	30.0	21.0	17.500	22.5	21.0	20.5	16.000
CD0XXA86C	DC-22.5	QPC-24	17.500	24.0	21.0	17.500	22.5	21.0	20.5	16.000
CD0XXA86C	DC-22.5	QPC-30	17.500	30.0	21.0	17.500	22.5	21.0	20.5	16.000
CD0XXA52C	DC-26.5	QPC-24	17.500	24.0	21.0	17.500	26.5	21.0	20.5	16.000
CD0XXA52C	DC-26.5	QPC-30	17.500	30.0	21.0	17.500	26.5	21.0	20.5	16.000
CD0XXA56C	DC-26.5	QPC-24	17.500	24.0	21.0	17.500	26.5	21.0	20.5	16.000
CD0XXA56C	DC-26.5	QPC-30	17.500	30.0	21.0	17.500	26.5	21.0	20.5	16.000
CD0XXA59C	DC-26.5	QPC-24	17.500	24.0	21.0	17.500	26.5	21.0	20.5	16.000
CD0XXA59C	DC-26.5	QPC-30	17.500	30.0	21.0	17.500	26.5	21.0	20.5	16.000
CD0XXA86F	DD-22.5	QPD-30	19.125	30.0	21.0	19.125	22.5	21.0	20.5	17.625
CD0XXA89F	DD-22.5	QPD-30	19.125	30.0	21.0	19.125	22.5	21.0	20.5	17.625
CD0XXA52F	DD-26.5	QPD-30	19.125	30.0	21.0	19.125	26.5	21.0	20.5	17.625
CD0XXA56F	DD-26.5	QPD-30	19.125	30.0	21.0	19.125	26.5	21.0	20.5	17.625
CD0XXA59F	DD-26.5	QPD-30	19.125	30.0	21.0	19.125	26.5	21.0	20.5	17.625
CD0XXA565	DE1-26.5	QPE1-30	20.500	30.0	21.0	20.500	26.5	21.0	20.5	19.000
CD0XXA595	DE1-26.5	QPE1-30	20.500	30.0	21.0	20.500	26.5	21.0	20.5	19.000
CD0XXA86D	DE-22.5	QPE-30	21.000	30.0	21.0	21.000	22.5	21.0	20.5	19.500
CD0XXA56D	DE-26.5	QPE-30	21.000	30.0	21.0	21.000	26.5	21.0	20.5	19.500
CD0XXA59D	DE-26.5	QPE-30	21.000	30.0	21.0	21.000	26.5	21.0	20.5	19.500
CD0XXA566	DF-26.5	QPF-30	22.750	30.0	21.0	22.750	26.5	21.0	20.5	21.250
CD0XXA596	DF-26.5	QPF-30	22.750	30.0	21.0	22.750	26.5	21.0	20.5	21.250
CD0XXA867	DG-22.5	QPG-30	24.500	30.0	21.0	24.500	22.5	21.0	20.5	23.000
CD0XXA567	DG-26.5	QPG-30	24.500	30.0	21.0	24.500	26.5	21.0	20.5	23.000
CD0XXA597	DG-26.5	QPG-30	24.500	30.0	21.0	24.500	26.5	21.0	20.5	23.000

Summit
Residential Products

For more information contact
Customer Service at
(817) 624-0820 or your Summit
Representative.

BACK

Spec.CD-010101
4.28.25

AHRI



Associate Member

501 Terminal Road • Fort Worth, TX 76106 • (817) 624-0820 • Fax (817) 624-8581